

FIBROUS

One company – more solutions

Smoke

Visko
Teepak™

Speeding up your
process to boost
profitability

Speeding up your process to boost profitability

ViskoTeepak™ Fibrous Smoke is a fibrous casing with smoke colour and flavour. It features a liquid smoke coating that eliminates the need to use smoke generators or liquid smoke.

The coating imparts a natural smoke aroma and colour, giving your meat or poultry product a smoky flavour and appearance. By reducing or eliminating the time required for smoking your food products, you can improve yield, productivity and profitability.

Process efficiency and product quality from built-in smoke

The even diffusion of flavour and colour is a further benefit of fibrous casings with “built-in” smoke – there are no fluctuations in



smoke aroma or intensity. And, unlike in a traditional smoking process, no rack marks are left on the surface of the product. This results in an end product that is not only delicious in terms of taste but also exquisite in appearance.

The advantages of Fibrous Smoke reach beyond the limits of your manufacturing plant: by using this unique casing solution, smoked products can be manufactured with a remarkably lessened environmental load, with zero smoke gas emissions into the atmosphere.

As you like it


Fibrous Smoke is available with low, medium and high smoke concentrations.

Low: For products that require a light smoke colour with only a hint of smoke aroma.

Medium: For products that require a moderately strong smoke colour and a clearly perceptible aroma of medium intensity.

High: For products that require intensive smoke aroma and colour.

It also has all the advantages of tried and true fibrous casings: calibre consistency, excellent curing properties, and an optimal balance between adhesion and peelability.

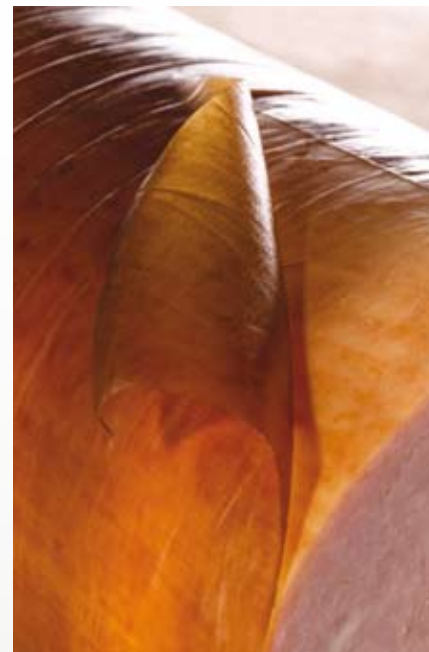

MOST POPULAR SIZES

Fibrous Smoke

45
60
77
80
85
88
91
92
95
96
111
118
130
165

Other colours are available on request.

HOW TO CHOOSE

The basics of Fibrous

ViskoTeepak™ fibrous casings receive their unique properties from a combination of a specially made paper base and a natural cellulosic covering. The paper base imparts strength and dimensional stability making it the best choice for high speed sausage production

plants. The cellulose impregnation provides permeability to water and smoke, and lets the casing stretch and shrink in accordance with the specific processing requirements of small or large scale producers.

Read more: viskoteepak.com



Finland

ViskoTeepak™
P.O.Box 18
FI-10901 Hanko
Phone +358 207 599 499
info@viskoteepak.com

Belgium

ViskoTeepak™
Maatheide 81
BE-3920 Lommel
Phone +32 11 550 711
info@viskoteepak.com

Russia

ViskoTeepak™
Representative Office
Moscow 119002
Karmanitsky per. 9,
office 614
Phone +7 495 956 0960
info@viskoteepak.com

Japan

ViskoTeepak™
2-13-20 Higashigaoka
Meguro-ku
Tokyo, 152-0021
Phone +81 90 3909 6737
info@viskoteepak.com

Mexico

ViskoTeepak™
Insurgentes Sur 1650,
Oficina 903
Col. Florida, Del. A. Obregon
CP 01030 Mexico D.F.
Phone +52 (55) 9000 1217
info@viskoteepak.com